


产品一览表

■ CNF10系列

品种一览及规格在□里放入T（卷带）或B（散装）

部件名	静电容量	静电容量公差	额定电压	额定电流	绝缘电阻	直流电阻	使用温度范围
CNF10C220S-□MN	22pF	+50/-20%	50V DC	0.3A DC	10,000MΩmin.	0.3Ωmax.	-55~+125°C
CNF10C470S-□MN	47pF						
CNF10C101S-□MN	100pF						
CNF10R221S-□M	220pF						
CNF10R471S-□M	470pF						
CNF10R102S-□M	1,000pF						
CNF10R222S-□M	2,200pF						
CNF10R223S-□M	22,000pF	25V DC	0.5A DC	0.15Ωmax.			

■ 插入损耗特性(参考)

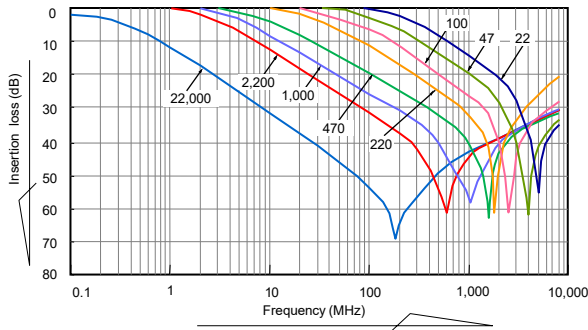


■ CNF20系列

品种一览及规格在□里放入T（卷带）或B（散装）

部件名	静电容量	静电容量公差	额定电压	额定电流	绝缘电阻	直流电阻	使用温度范围
CNF20C220S-□MN	22pF	+50/-20%	50V DC	0.4A DC	10,000MΩmin.	0.3Ωmax.	-55~+125°C
CNF20C470S-□MN	47pF						
CNF20C101S-□MN	100pF						
CNF20C221S-□MN	220pF						
CNF20R471S-□M	470pF						
CNF20R102S-□M	1,000pF						
CNF20R222S-□M	2,200pF						

■ 插入损耗特性(参考)

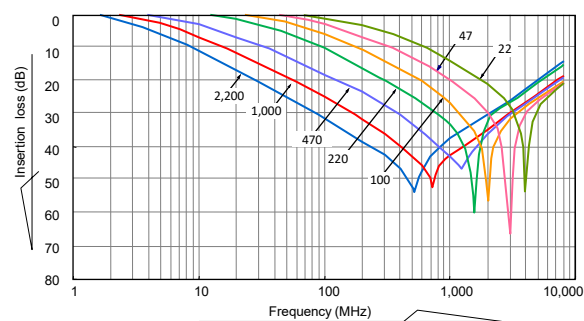


■ CNF31系列

品种一览及规格在□里放入T（卷带）或B（散装）

部件名	静电容量	静电容量公差	额定电压	额定电流	绝缘电阻	直流电阻	使用温度范围
CNF31C220S-□MN	22pF	+50/-20%	50V DC	0.3A DC	10,000MΩmin.	0.3Ωmax.	-55~+125°C
CNF31C470S-□MN	47pF						
CNF31C101S-□MN	100pF						
CNF31C221S-□MN	220pF						
CNF31R471S-□MN	470pF						
CNF31R102S-□MN	1,000pF						
CNF31R222S-□MN	2,200pF						
CNF31R223S-□MN	22,000pF						

■ 插入损耗特性 (参考)

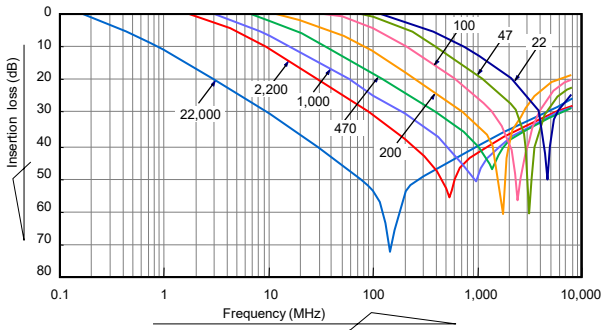

■ CNF41系列

品种一览及规格在□里放入T（卷带）或B（散装）

部件名	静电容量	静电容量公差	额定电压	额定电流	绝缘电阻	直流电阻	使用温度范围
CNF41C220S-□MN	22pF	+50/-20%	100V DC	0.3A DC	10,000MΩmin.	0.3Ωmax.	-55~+125°C
CNF41C470S-□MN	47pF						
CNF41C101S-□MN	100pF						
CNF41C221S-□MN	220pF						
CNF41C471S-□MN	470pF						
CNF41R102S-□M	1,000pF						
CNF41R222S-□M	2,200pF						
CNF41R103S-□M	10,000pF						
CNF41R223S-□M	22,000pF						

■ 插入损耗特性 (参考)

