

产品一览表

金属螺丝钉类型

■产品一览表及规格(M 3, M4螺丝钉类型)

品名	静电容量	静电容量公差	额定电压	耐电压	额定电流	温度特性	使用温度范围	插入损耗No.	外观图
FTT302AR102S-S	1,000pF	+50, -20%	100Vdc	250Vdc	10A _{dc}	R (+15~-15%)	-55~+125°C	1	Style1
FTT302AR472S-S	4,700pF							2	
FTT302AR103S-S	10,000pF							3	
FTT402AR102S-S	1,000pF							4	Style2
FTT402AR103S-S	10,000pF							5	
FTT402AR223S-S	22,000pF							6	
FTT402AR473S-S	47,000pF							7	


英制螺丝钉类型

■产品一览表及规格(No.8-32 UNC 2A类型)


品名	静电容量	静电容量公差	额定电压	耐电压	额定电流	温度特性	使用温度范围	插入损耗No.	外观图
FTT412AR102S-S	1,000pF	+50, -20%	100Vdc	250Vdc	10A _{dc}	R (+15~-15%)	-55~+125°C	4	Style2
FTT412AR103S-S	10,000pF							5	
FTT412AR223S-S	22,000pF							6	
FTT412AR473S-S	47,000pF							7	

■形状·尺寸

Style 1 外层的电镀：镍

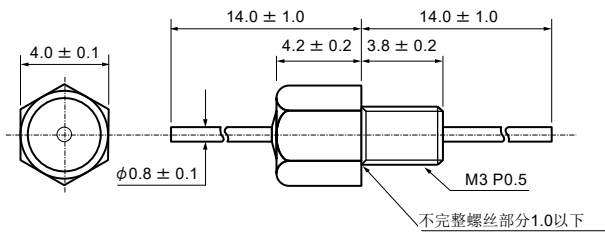


Style 2 外层的电镀：镍

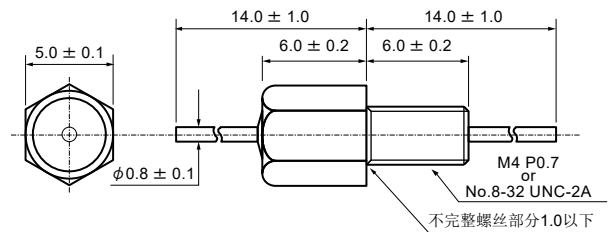

■插入损耗特性（参考）

FTT30型插入损耗特性数据

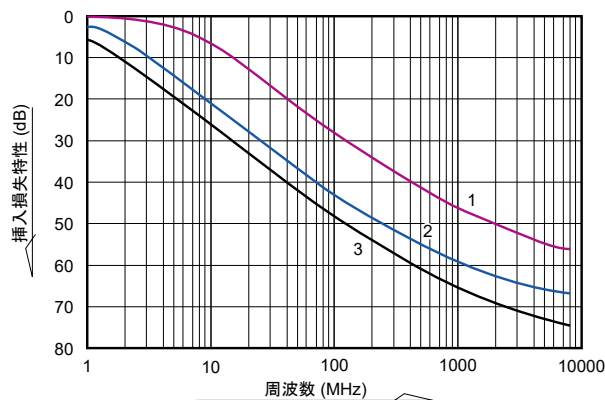

FTT40, FTT41型插入损耗特性数据

