

## List of Products

### Meter Screw Type

#### M3, M4 Screw Type

Type	Capacitance	Capacitance Tolerance	Rated Voltage	Test Voltage	Rated Current	Temp. Characteristic	Working Temp. Range	Insertion Loss Graph No.	Style No.
FTT302AR102S-S	1,000pF	+50, -20%	100Vdc	250Vdc	10Adc	R (+15~-15%)	-55~+125°C	1	Style1
FTT302AR472S-S	4,700pF							2	
FTT302AR103S-S	10,000pF							3	
FTT402AR102S-S	1,000pF							4	Style2
FTT402AR103S-S	10,000pF							5	
FTT402AR223S-S	22,000pF							6	
FTT402AR473S-S	47,000pF							7	


### Inch Screw Type

#### No.8-32 UNC 2A Type


Type	Capacitance	Capacitance Tolerance	Rated Voltage	Test Voltage	Rated Current	Temp. Characteristic	Working Temp. Range	Insertion Loss Graph No.	Style No.
FTT412AR102S-S	1,000pF	+50, -20%	100Vdc	250Vdc	10Adc	R (+15~-15%)	-55~+125°C	4	Style2
FTT412AR103S-S	10,000pF							5	
FTT412AR223S-S	22,000pF							6	
FTT412AR473S-S	47,000pF							7	

### Shape/Dimension

**Style 1** Shell Plating Spec: Nickel

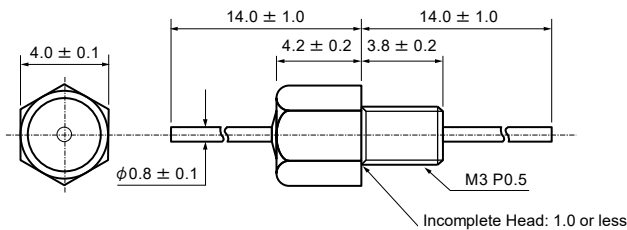


**Style 2** Shell Plating Spec: Nickel

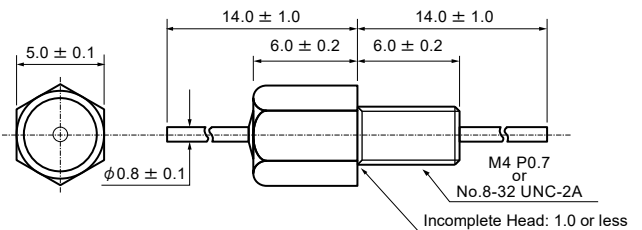

### Insertion Loss (Reference)

FTT30 Type Insertion Loss Data

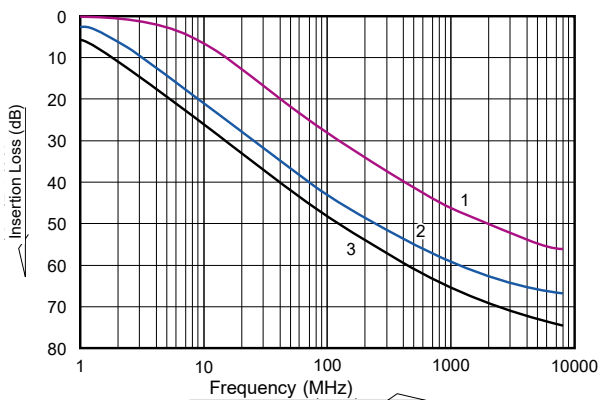

FTT40, FTT41 Type Insertion Loss Data

